

Labelling

ML 50

High-performance indicator for connection to external labelling machine




Características

- ✓ Housing with stainless steel finish (matt polished).
- ✓ ARM microprocessor 4Mb RAM.
- ✓ Graphic display 240x64 dots, alphanumeric indication.
- ✓ Possibility of programming 80 label formats including 2 Bitmap format logos up to 12Kb.
- ✓ 98-key alphanumeric keypad with 49 direct PLU's and 4 direct function keys.
- ✓ Stand-by key for equipment disconnection.
- ✓ Label management via PC through Gedit via RS232 or Ethernet.
- ✓ Possibility of interconnection of up to 60 devices via Ethernet.
- ✓ Net weight: 4.15 kg / Packed: 6.2 kg.
- ✓ Packing dimensions: 26 x 16 x 25 cm.

Options

- ✓ Connection to scanner.
- ✓ Connection to external labeller.

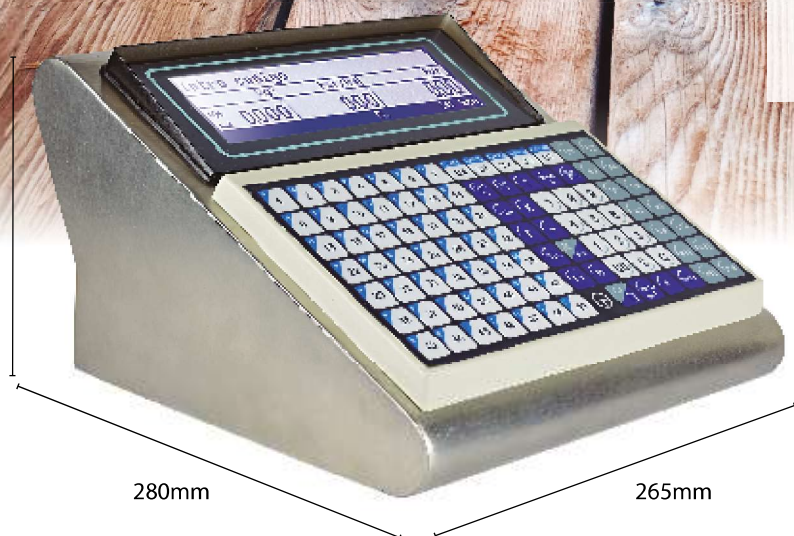

The Epelsa Group has external labellers available for connection to the ML 50 indicator.

