



MARS *EVO*



Wireless without limits

Rechargeable battery
VFD display
Silicone membrane keyboard
57 mm thermal printer
Ethernet and WiFi connectivity
USB and RS232 ports
12V / 2.5A power supply
Capacities 6/15 kg



OBJECTIVE

street market
small business
supermarkets
fruit shops
butchers
gourmet shops
chain stores



MARS *EVO*

GENERAL INFORMATION



Stainless steel plate
342 mm × 275 mm

ABS housing
high durability

LCD screen
front and rear
or in column
depending on
model

25-key keyboard
silicone membrane

Level

Shortcut keys
up to 14 keys


Thermal printer up to 57mm
print speed 150 mm/s

MARS *EVO*



CONNECTIVITY

- Ports: USB / RS232 / Ethernet
- Wireless options:
 - Wi-Fi (cloud synchronization)
 - NFC/M1/RF module -2.4G for peripherals (scanner, cash drawer, etc.)
- Compatible with ERP software and store management systems

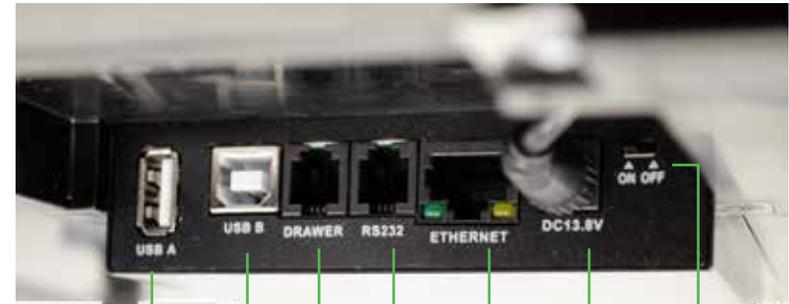

USB keyboard or scanner
Coin drawer
Ethernet
Switch
Power
USB parameters and data
RS232

MARS *EVO*

PRINTER

High-speed thermal printer

Paper up to 57 mm wide

Easy and quick access to the roll change compartment



MARS *EVO*

COLUMN ASSEMBLY

Column with LCD display

Easy assembly

Height of equipment with column: 541 mm




KEY FEATURES

- **Rechargeable battery PROTECTION** against power outages
- **Patented insect-proof design**
- **Market-leading print speed (150 mm/s)**
- **Floating transaction mode: allows purchases to continue at another station**
- **Removable silicone keyboard: editable from PC, over 10 million keystrokes**

MANAGEMENT

- **Over 20,000 products**
- **Up to 200 barcodes per product**
- **Sales, product, discount, department, or employee reports**
- **Configuration and updating from a PC via USB or RS232**

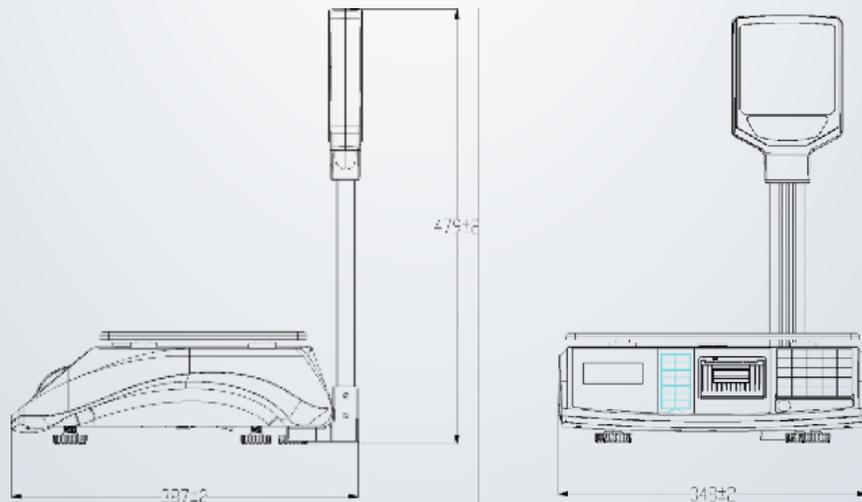

SPECIFICATIONS



Scale	n=3000
Capacities	6kg/15kg - 15kg/30kg
Range	2g/5g; 5g/10g
Display	65*132 LCD display with backlight for salesperson and customer 25 function keys + 14*2 programmable keys
Keyboard	
Keyboard lifespan	>10 million keystrokes
Printer	Thermal printer with easy paper loading
Print speed	150mm/s (with external charger connected)
Paper width	57 mm
Print head lifespan	Estimated at 100 km
Paper outer diameter	50 mm
Battery	7.4V 3300mAh Li-ion battery. Up to 20 hrs.
Power supply	AC 220V 50Hz/ DC 13.8V 2.5A
Connectivity	USB type A, USB type B, RS232, cash drawer, Ethernet (only for Ethernet type)
Wi-Fi (optional)	Wi-Fi
Power consumption	12V/2.5A
Operating temperature	0°C~40°C / 5%-85% RH
Equipment dimensions	Without column: 346 × 399 × 134.5 mm
Plate dimensions	With column: 346 × 399 × 541 mm
Plate dimensions	342 mm × 275 mm

